

## Automotive Aftermarket Division

# 3M™ 50388/ 50457 Perfect it™ Polishing Pad

---

### 1) Part Numbers

**3M 50388 Perfect it™ Polishing Pad 150 mm**

**3M 50457 Perfect it™ Polishing Pad 76 mm**



### 2) Description and end uses

A fine and soft polishing pad that achieves maximum gloss when used with 3M Ultrafina SE Polish. Suitable for removing holograms and swirl marks

### 3) Physical Properties


Feature	Unit	Value	Testing Spec
Density	Kg/m <sup>3</sup>	27	DIN EN ISO 845



Effective : 07/02/12

Supersedes : First issue


**3M 50388 Perfect it™ Polishing Pad 150 mm**

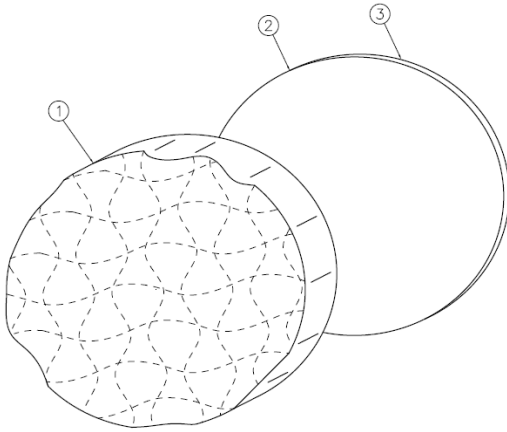

EXPLODED VIEW - NOT TO SCALE

	50388 Blue Polishing Convoluted Foam Pad
1	Blue PU Foam Convoluted
2	White Brushed Nylon Loop
3	3M Artwork

**3M 50457 Perfect it™ Polishing Pad 76 mm**

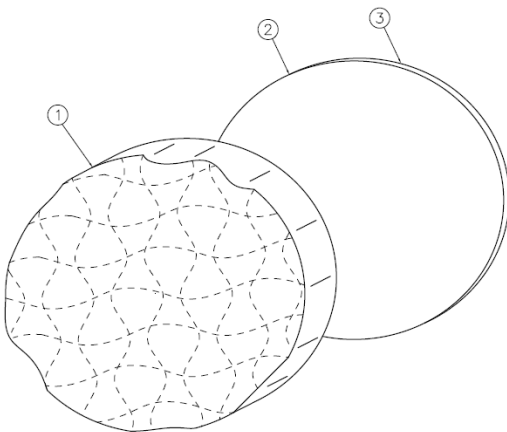

EXPLODED VIEW - NOT TO SCALE

	50457 Blue Polishing Convoluted Foam Pad
1	Blue PU Foam Convoluted
2	White Brushed Nylon Loop
3	3M Artwork

Feature	Benefits
Polyurethane foam-very soft Strong foam, good wear resistance Good quality/no contamination Cell structure and compressive strength	Hologram Free Finish Good tear strength and life Scratch free finish Maximum polishing efficiency

4) **Directions for Use**

1. Remove paint imperfections from panel as per 3M recommendations
2. Use 3M Polishing Back up pad on a suitable polishing machine
3. Centralise polishing pad on the back-up pad for balanced running
4. Wash and dry polishing pad regularly to keep pad clean for all applications to obtain a consistent polished finish
5. Replace the polishing pad when it is worn down or when the attachment becomes weak.
6. Replace the polishing back up pad when the hook attachment is worn

From this

to this using Ultrafina Polish





Effective : 07/02/12

Supersedes : First issue

## 5) **Storage**

It is recommended that all products should be stored at constant levels of temperature and humidity within the ranges of 18-22°C, 35-50% RH. They should be kept away from damp (or cold) walls, windows or floors to avoid possible moisture absorption. Equally storage adjacent to heat sources e.g. steam pipes, radiators, hot air ducts, ovens, etc, should be avoided.

Product is best stored in original packaging until ready for use. Shelf Life is indefinite under these ideal storage conditions.

## 6) **Safety**

Whenever possible, polishing should be carried out in a well-ventilated area and it is strongly recommended that suitable goggles, dust mask and gloves are used.

Use: Use only in well ventilated areas

Eye contact: Avoid contact with eyes  
In case of contact with eyes rinse immediately with plenty of water and seek medical advice

The supplier disclaims any liability where the user does not wear the recommended personal protective equipment.

## 7) **Disclaimer**

All statements, technical information and recommendations are based on tests we believe to be reliable but the accuracy or completeness thereof is not guaranteed. Please ensure before using our product that it is suitable for your intended use. All questions of reliability relating to this product are governed by the Terms of Sale subject, where applicable, to the prevailing law.

Automotive Aftermarket  
3M United Kingdom plc  
Phone: 0161 237 6391  
Fax: 0161 237 5911

[aadenquiries.uk@mmm.com](mailto:aadenquiries.uk@mmm.com)  
[www.3Mbodyshop.co.uk](http://www.3Mbodyshop.co.uk)

Effective : 07/02/12

Supersedes : First issue

